



POS120 Series

The POS 120 Series were specially designed for the POS applications, such as, an adjustable tilt angle from 0 degree ~ 70 degrees, a versatile Touch and a choice of 12.1", 15", screen sizes. Besides Power USB, Magnetic Card Reader and Customer Display Unit can be added to provide a 3C (Compact, Convenient, Complete) POS solution.

Rigid mechanism structure


Robust design in touch screen and hinge for multi-purpose applications

Cost effectiveness

Latest graphics technology adapted at lowest cost
System mechanism leveraged over other products



Features

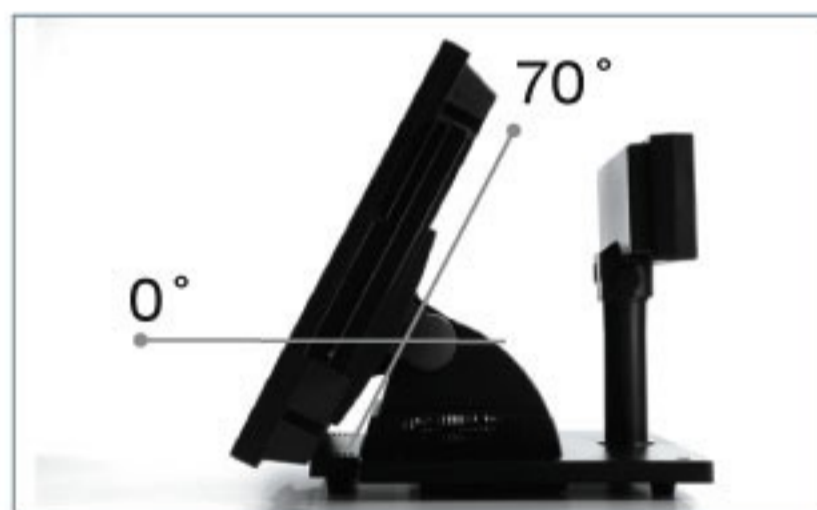

1. Tilt Angle 0~70 degree
Adapt to operation in any environment



2. Magnetic Card Reader
For serial interface or keyboard interface



3. Internal Power Adapter Design



4. Internal Speakers (Optional)
Stereo sound for voice command



5. Streamline Rear Cover
Strong Hinge Support



6. Customer Display Pole type
VFD type (2X20)
LCD type (Graphic)

POS 120 Series



POS 122



POS 125

Specification

Model Name	POS122	POS125
LCD / Touch Panel		
LCD Size	12.1" TFT	15" TFT
Brightness (nits)	up to 180 cd / m ²	up to 250 cd / m ²
Maximal Resolution	800x 600 / 1024 x 768	1024 x 768
Touch Screen Type	Resistive	
Tilt Angle (Degree)	0~70	
External I / O Ports		
Front I / O		
USB	2 (V2.0)	
Power USB	1 port (12 V)	
OSD Buttons	Power on / off, Menu, Video function adjustment, Exit	
Rear I / O		
PS / 2	2 (1 x MSR, 1 x external keyboard)	
Serial / COM	2 (for touch screen & MSR) input	
USB	1 (V2.0) input	
Line Input	1 port (Optional)	
Power on / off	1 x DC in jack	
Power Supply / Adapter	Internal 60 W Power Adapter (12V / 5A)	
Environment		
EMC & Safety	FCC / CE Class A, LVD	
Operating Temperature	0 °C~ 35 °C	
Storage Temperature	-10 °C~ 60 °C	
Options		
Magnetic Card Reader	3 Tracks (RS-232 / PS2 type)	
Customer Display	VFC / LCD Pole Display	
Internal Speakers	2 x 2W (Optional)	
Dimension (W x D x H) mm	310 x 200 x 282	386 x 200 x 340

©2005 Flytech Technology Co., Ltd. Registered trademarks and trademarks are property of their respective owners. The specification is subject to change without prior notice. Flytech endeavors to ensure that the information in this document is correct and fairly stated but does not accept liability for any error or omissions. The development of Flytech products and services is continuous, and published information may not be up to date. It is important to check the current position with Flytech.

S - 1008 - 0506 - 3012A



FLYTECH Technology Co., Ltd.

No.168, Sing-ai Rd.,
Neihu District, Taipei City 114,
TaiwanTel: 886-2-8791-4988
Fax: 886-2-8791-4966
E-mail: ft@flytech.com.tw
www.flytech.com

USA

1931 Hartog Drive, San Jose, CA 95131, U.S.A. Tel: 408-573-9113 Fax: 408-573-9509 E-mail: carry-1@flytech.com

Japan

101-3-17-11 Inada, Nagano-Shi, Nagano-Ken, Japan Tel: 81-26-244-6216 Fax: 81-26-244-6197 E-mail: ftjp@flytech.co.jp

Hong Kong

Room 01, 6/F., Block A, Tonic Industrial Centre, 26 Kai Cheung Road, Kowloon Bay, Kowloon, Hong Kong, China
Tel: 852-3525-5800 Fax: 852-2751-7447 E-mail: flytech@flytech.com.hk http://www.flytech.com/flytech-hk.htm

China

3F Building 39, No.333 Qin Jiang Rd., Shang-Hai 200233, China Tel: 86-21-5426-1555 Fax: 86-21-5426-1001 E-mail: info@flytech.com.cn

©2005-2006 FLYTECH Technology Co., Ltd. All right reserved.